


# LS EHV Cable System

66~500kV XLPE Cable & Accessories

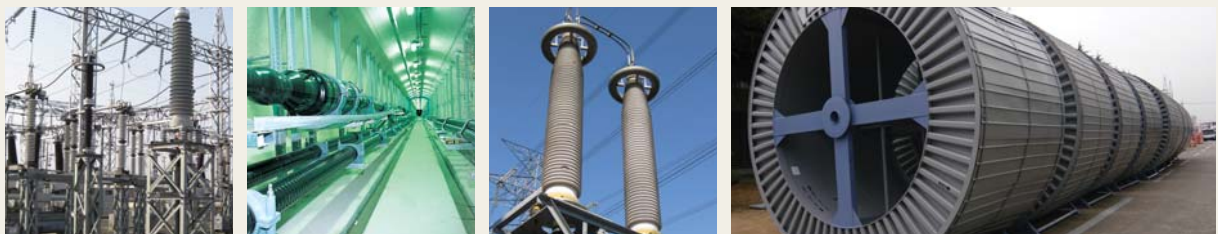

## Total Solution for Underground Transmission System

LS Cable is one of the world's leading manufacturers of extra high voltage cable and accessories and also one of a few total solution providers of underground transmission system. We are prominently capable and facilitated in researching, designing, developing, and manufacturing products and solutions with a heritage of decades as a cable manufacturer and ceaseless invest on quality control.

We provide power system from 66kV ~ 500kV such as XLPE cables, terminations, joints and other related products as some parts of our total solution maximizing the competitive advantage in 230kV and higher voltage system. Especially, the certificate for the satisfactory completion of Type Test and Pre-qualification Test by KEMA lasted for 365 days in 400kV XLPE cable and accessories and shows the quality of full range of our products and system.



## Commitment to Our Customers

As an extra high voltage cable and accessories manufacturer and a division of LS Cable, we never stop researching, designing, developing, and manufacturing products with the higher level of quality to address the ever-changing demands in everyday life as well as in the industry.


Our quality control meets the most delicate requirements of international standards and the high level of quality is recognized both by local and international clients. Our commitment to develop and deliver solutions to address our customers' needs and challenges keep our technology on the cutting edge and our know-how in the field more valuable, which our customers highly appreciate.

We are looking forward to working with you.

# 1.00 Design & Construction of XLPE Cable

## Structure of XLPE Cable

The XLPE Cable has the construction of a conductor (copper or aluminum) insulated with the cross-linked polyethylene and then shielded with metallic screen (corrugated and seamless aluminum or wire shield), to be covered by PVC or polyethylene for anti-corrosion.

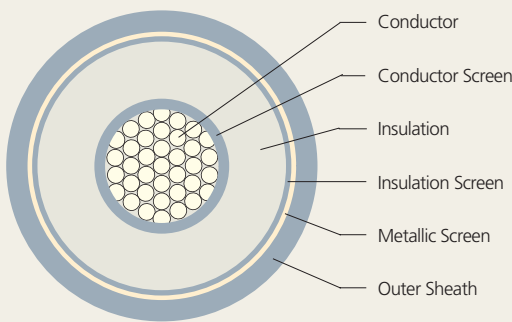

## Conductor

The conductor consists of annealed copper or hard aluminum stranded wires and classified into three (3) major types of concentric, compacted circular and segmental compacted circular.

The concentric is the wires wound up concentrically, the compacted circular conductor consists of segments wound up and then compacted. Normally the segmental compacted circular conductor has four (4) segments and is applied for the cross-section over than  $800\text{mm}^2$ , to prevent the increase of A.C. resistance caused by skin effect. When the conductor's cross-section is less than  $630\text{mm}^2$ , the compacted circular is applied generally.

## Conductor Screen

The conductor screen consists of an extruded semi-conducting polyethylene to minimize electrical stresses due to the stranded configuration of the conductor. The semi-conducting material used for conductor screen has no deleterious effect on the conductor. Semi-conducting tape is sometimes applied as a separator.

## Insulation

The insulation material is extruded cross-linked polyethylene. The conductor screen, the insulation and the insulation screen mentioned to the following clause are extruded simultaneously in one process to ensure that the screen and insulation are intimately bonded together and free from all possibilities of voids between layers.

The extrusion process is carried out under strictly controlled atmospheric conditions.

The thickness of the insulation layer is the maximum value figured out from the design of the impulse voltage and A.C. voltage.

The conventional cross-linking process by saturated steam has frequently caused deterioration of the electrical characteristics of the insulation as treeing phenomena arose when put to use for long time. But the new process by  $\text{N}_2$  gas has enabled to protect the electrical characteristics from being deteriorated and to lessen the thickness of the insulation and accordingly the cable's outer diameter itself.

## Insulation Screen

The insulation screen is provided over the insulation by extruding the semi-conducting compound concentrically and circularly to minimize the possibility of ionization on the outer surface of the dielectric.

## Metallic Screen

The metallic screen consists of the wire shield, the corrugated aluminum sheath or the lead sheath. The corrugated aluminum sheath and the lead sheath is also adopted where the surface of duct is poor and where moisture is high.


## Outer Sheath

To protect the metallic sheath from electrical or chemical corrosion, it is covered by PE or PVC.

## Corrugated Aluminum Sheath Cable



## Lead Sheath Cable

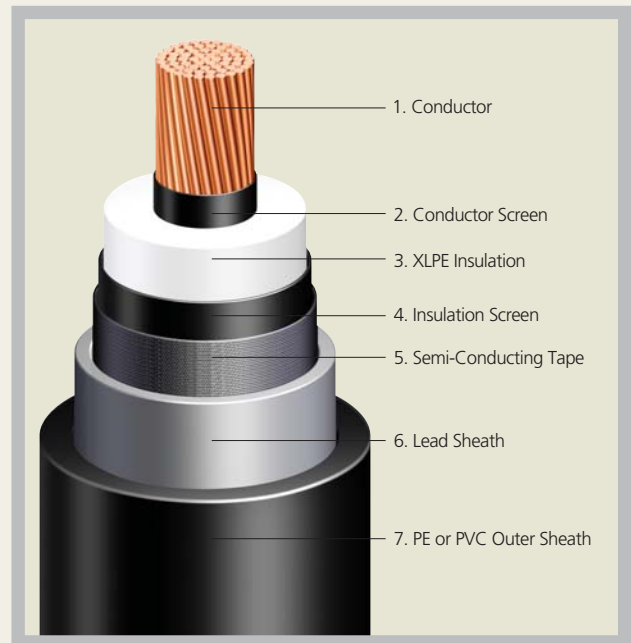

## Wire Shield Cable



## Copper Laminated Cable






## 4.00 XLPE Insulated Cables

- 4.01 36/66 (72.5) kV with Aluminum Sheath
- 4.02 36/66 (72.5) kV with Lead Sheath
- 4.03 36/66 (72.5) kV with Copper Wire Shield
  
- 4.04 64/110 (123) kV with Aluminum Sheath
- 4.05 64/110 (123) kV with Lead Sheath
- 4.06 64/110 (123) kV with Copper Wire Shield
  
- 4.07 76/132 (145) kV with Aluminum Sheath
- 4.08 76/132 (145) kV with Lead Sheath
- 4.09 76/132 (145) kV with Copper Wire Shield
  
- 4.10 87/161 (170) kV with Aluminum Sheath
- 4.11 87/161 (170) kV with Lead Sheath
- 4.12 87/161 (170) kV with Copper Wire Shield
  
- 4.13 127/230 (245) kV with Aluminum Sheath
- 4.14 127/230 (245) kV with Lead Sheath
- 4.15 127/230 (245) kV with Copper Wire Shield
  
- 4.16 190/345 (362) kV with Aluminum Sheath
- 4.17 190/345 (362) kV with Lead Sheath
  
- 4.18 220/400 (420) kV with Aluminum Sheath
- 4.19 220/400 (420) kV with Lead Sheath
  
- 4.20 290/500(525)kV with Alumimum Sheath
- 4.21 290/500(525)kV with Lead Sheath

## 4.01 36/66 (72.5) kV with Aluminum Sheath

### Aluminum Sheath

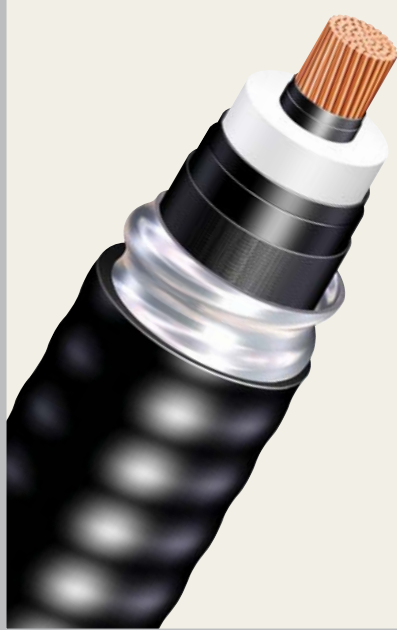

**Construction**

- Copper Conductor
- XLPE Insulation
- Aluminum Sheath
- PE (or PVC) Outer Sheath

**Continuous Current Ratings for Single Circuit (A)**


Cross-Sectional Area (mm <sup>2</sup> )	Direct Buried	Pipe Duct	In Air	
			Trefoil	Flat (S=2D)
240	524	491	598	671
300	592	556	682	770
400	671	631	781	888
500	762	714	894	1025
630	878	808	1023	1187
800	965	928	1150	1355
1000	1119	1075	1361	1615
1200	1198	1146	1460	1745
1600	1352	1357	1654	2030
2000	1468	1475	1800	2273

### Constructional Data (Nominal Values)

Cross-Sectional Area	Conductor		Thickness of Conductor Screen Approx.	Thickness of Insulation	Thickness of Insulation Screen Approx.	Thickness of Aluminum Sheath	Thickness of Outer Sheath	Outer Diameter of Cable	Weight of Cable	Max. DC Conductor Resistance at 20°C	Capacitance
	Shape	Diameter									
mm <sup>2</sup>		mm	mm	mm	mm	mm	mm	mm	kg / m	Ω / km	μF / km
240	Compact Round Stranded	18.1	1.0	11.0	1.0	1.6	3.5	69	5.5	0.0754	0.20
300		20.4	1.0	11.0	1.0	1.6	3.5	72	6.3	0.0601	0.21
400		23.2	1.0	11.0	1.0	1.7	3.5	75	7.2	0.0470	0.23
500		26.3	1.0	11.0	1.0	1.8	4.0	79	8.6	0.0366	0.25
630		30.2	1.0	11.0	1.0	1.8	4.0	83	10.1	0.0283	0.28
800		34.0	1.0	11.0	1.0	1.9	4.0	87	12.0	0.0221	0.30
1000		38.7	1.0	11.0	1.0	2.0	4.0	92	14.4	0.0176	0.33
1200	Segment Stranded (Miliken)	41.8	1.0	11.0	1.0	2.1	4.5	98	16.7	0.0151	0.36
1600		48.1	1.0	11.0	1.0	2.2	4.5	105	20.9	0.0113	0.40
2000		54.3	1.0	11.0	1.0	2.4	4.5	112	25.4	0.0090	0.44

## 4.02 36/66 (72.5) kV with Lead Sheath

### Lead Sheath



**Construction**

- Copper Conductor
- XLPE Insulation
- Lead Sheath
- PE (or PVC) Outer Sheath

**Continuous Current Ratings for Single Circuit (A)**

Cross-Sectional Area (mm <sup>2</sup> )	Direct Buried	Pipe Duct	In Air	
			Trefoil	Flat (S=2D)
240	535	525	621	706
300	606	567	710	810
400	691	646	822	942
500	787	733	951	1098
630	898	833	1096	1274
800	1008	958	1243	1462
1000	1184	1121	1505	1759
1200	1282	1208	1648	1938
1600	1469	1434	1906	2282
2000	1626	1585	2130	2597

### Constructional Data (Nominal Values)

Cross-Sectional Area	Conductor		Thickness of Conductor Screen Approx.	Thickness of Insulation	Thickness of Insulation Screen Approx.	Thickness of Lead Sheath	Thickness of Outer Sheath	Outer Diameter of Cable	Weight of Cable	Max. DC Conductor Resistance at 20°C	Capacitance
	Shape	Diameter									
mm <sup>2</sup>		mm	mm	mm	mm	mm	mm	mm	kg / m	Ω / km	μF / km
240	Compact Round Stranded	18.1	1.0	11.0	1.0	2.1	3.5	62	8.1	0.0754	0.20
300		20.4	1.0	11.0	1.0	2.2	3.5	64	9.1	0.0601	0.21
400		23.2	1.0	11.0	1.0	2.3	3.5	67	10.5	0.0470	0.23
500		26.3	1.0	11.0	1.0	2.4	4.0	72	12.5	0.0366	0.25
630		30.2	1.0	11.0	1.0	2.4	4.0	76	14.2	0.0283	0.28
800		34.0	1.0	11.0	1.0	2.6	4.0	80	16.9	0.0221	0.30
1000		38.7	1.0	11.0	1.0	2.7	4.0	85	19.9	0.0176	0.33
1200	Segment Stranded (Miliken)	41.8	1.0	11.0	1.0	2.8	4.5	91	23.0	0.0151	0.36
1600		48.1	1.0	11.0	1.0	3.0	4.5	97	28.0	0.0113	0.40
2000		54.3	1.0	11.0	1.0	3.2	4.5	104	33.4	0.0090	0.44

36/66 (72.5) kV

64/110 (123) kV

76/132 (145) kV

87/161 (170) kV

127/230 (245) kV


190/345 (362) kV

220/400 (420) kV

290/500 (525) kV

## 4.03 36/66 (72.5) kV with Copper Wire Shield

### Copper Wire Shield



**Construction**

- Copper Conductor
- XLPE Insulation
- Copper Wire Shield
- PE (or PVC) Outer Sheath

**Continuous Current Ratings for Single Circuit (A)**

Cross-Sectional Area (mm <sup>2</sup> )	Direct Buried	Pipe Duct	In Air	
			Trefoil	Flat (S=2D)
240	530	483	606	692
300	599	544	693	795
400	683	616	802	925
500	780	729	929	1075
630	886	828	1066	1247
800	997	929	1210	1432
1000	1173	1087	1473	1728
1200	1270	1173	1611	1894
1600	1465	1375	1883	2245
2000	1627	1530	2111	2556

### Constructional Data (Nominal Values)

Cross-Sectional Area	Conductor		Thickness of Conductor Screen Approx.	Thickness of Insulation	Thickness of Insulation Screen Approx.	Diameter & Number of Copper Wires	Thickness of Outer Sheath	Outer Diameter of Cable	Weight of Cable	Max. DC Conductor Resistance at 20°C	Capacitance
	Shape	Diameter									
mm <sup>2</sup>		mm	mm	mm	mm	mm x No.	mm	mm	kg / m	Ω / km	μF / km
240	Compact Round Stranded	18.1	1.0	11.0	1.0	1.2 x 40	3.5	58	4.4	0.0754	0.20
300		20.4	1.0	11.0	1.0	1.2 x 40	3.5	60	5.1	0.0601	0.21
400		23.2	1.0	11.0	1.0	1.2 x 40	3.5	63	5.9	0.0470	0.23
500		26.3	1.0	11.0	1.0	1.2 x 40	4.0	66	7.2	0.0366	0.25
630		30.2	1.0	11.0	1.0	1.2 x 40	4.0	71	8.6	0.0283	0.28
800		34.0	1.0	11.0	1.0	1.2 x 40	4.0	75	10.4	0.0221	0.30
1000		38.7	1.0	11.0	1.0	1.2 x 40	4.0	80	12.7	0.0176	0.33
1200	Segment Stranded (Miliken)	41.8	1.0	11.0	1.0	1.2 x 40	4.5	85	14.7	0.0151	0.36
1600		48.1	1.0	11.0	1.0	1.2 x 40	4.5	91	18.7	0.0113	0.40
2000		54.3	1.0	11.0	1.0	1.2 x 40	4.5	97	22.7	0.0090	0.44

# 4.04 64/110 (123) kV with Aluminum Sheath



## Aluminum Sheath



### Construction

- Copper Conductor    ■ XLPE Insulation
- Aluminum Sheath    ■ PE (or PVC) Outer Sheath

### Continuous Current Ratings for Single Circuit (A)

Cross-Sectional Area (mm <sup>2</sup> )	Direct Buried	Pipe Duct	In Air	
			Trefoil	Flat (S=2D)
240	520	491	592	657
300	587	550	677	755
400	667	639	775	873
500	758	725	889	1006
630	860	821	1020	1169
800	961	915	1147	1333
1000	1109	1057	1346	1581
1200	1187	1180	1451	1717
1600	1338	1332	1635	1995
2000	1458	1447	1787	2236
2500	1538	1526	1885	2358


## Constructional Data (Nominal Values)

Conductor			Thickness of Conductor Screen Approx.	Thickness of Insulation	Thickness of Insulation Screen Approx.	Thickness of Aluminum Sheath	Thickness of Outer Sheath	Outer Diameter of Cable	Weight of Cable	Max. DC Conductor Resistance at 20°C	Capacitance
Cross-Sectional Area	Shape	Diameter									
mm <sup>2</sup>		mm	mm	mm	mm	mm	mm	mm	kg / m	Ω / km	μF / km
240	Compact Round Stranded	18.1	1.2	14.0	1.0	1.7	3.5	76	6.3	0.0754	0.17
300		20.4	1.2	14.0	1.0	1.8	3.5	78	7.0	0.0601	0.18
400		23.2	1.2	14.0	1.0	1.8	3.5	81	8.0	0.0470	0.20
500		26.3	1.2	14.0	1.0	1.9	4.0	86	9.3	0.0366	0.21
630		30.2	1.2	14.0	1.0	2.0	4.0	90	11.0	0.0283	0.23
800		34.0	1.2	14.0	1.0	2.0	4.0	94	12.9	0.0221	0.25
1000		38.7	1.2	14.0	1.0	2.1	4.0	99	15.4	0.0176	0.28
1200	Segment Stranded (Miliken)	41.8	1.2	14.0	1.0	2.2	4.5	104	17.7	0.0151	0.30
1600		48.1	1.2	14.0	1.0	2.4	4.5	111	22.1	0.0113	0.33
2000		54.3	1.2	14.0	1.0	2.5	4.5	118	26.5	0.0090	0.36
2500		63.0	1.2	14.0	1.0	2.6	4.5	128	33.0	0.0072	0.40

36/66 (72.5) kV  
 64/110 (123) kV  
 76/132 (145) kV  
 87/161 (170) kV  
 127/230 (245) kV  
 190/345 (362) kV  
 220/400 (420) kV  
 290/500 (525) kV

## 4.05 64/110 (123) kV with Lead Sheath

### Lead Sheath



**Construction**

- Copper Conductor
- XLPE Insulation
- Lead Sheath
- PE (or PVC) Outer Sheath

**Continuous Current Ratings for Single Circuit (A)**

Cross-Sectional Area (mm <sup>2</sup> )	Direct Buried	Pipe Duct	In Air	
			Trefoil	Flat (S=2D)
240	533	498	617	692
300	602	563	705	794
400	687	654	816	923
500	782	744	939	1068
630	891	846	1083	1243
800	1001	949	1229	1425
1000	1176	1108	1486	1718
1200	1269	1235	1612	1871
1600	1455	1415	1870	2206
2000	1609	1562	2087	2505
2500	1695	1647	2201	2642


### Constructional Data (Nominal Values)

Conductor			Thickness of Conductor Screen Approx.	Thickness of Insulation	Thickness of Insulation Screen Approx.	Thickness of Lead Sheath	Thickness of Outer Sheath	Outer Diameter of Cable	Weight of Cable	Max. DC Conductor Resistance at 20°C	Capacitance
Cross-Sectional Area	Shape	Diameter									
mm <sup>2</sup>		mm	mm	mm	mm	mm	mm	mm	kg / m	Ω / km	μF / km
240	Compact Round Stranded	18.1	1.2	14.0	1.0	2.3	3.5	68	9.6	0.0754	0.17
300		20.4	1.2	14.0	1.0	2.4	3.5	71	10.9	0.0601	0.18
400		23.2	1.2	14.0	1.0	2.5	3.5	74	12.3	0.0470	0.20
500		26.3	1.2	14.0	1.0	2.5	4.0	78	13.8	0.0366	0.21
630		30.2	1.2	14.0	1.0	2.6	4.0	82	16.0	0.0283	0.23
800		34.0	1.2	14.0	1.0	2.7	4.0	86	18.5	0.0221	0.25
1000		38.7	1.2	14.0	1.0	2.9	4.0	92	21.9	0.0176	0.28
1200	Segment Stranded (Miliken)	41.8	1.2	14.0	1.0	3.0	4.5	97	24.7	0.0151	0.30
1600		48.1	1.2	14.0	1.0	3.2	4.5	103	30.1	0.0113	0.33
2000		54.3	1.2	14.0	1.0	3.4	4.5	110	35.7	0.0090	0.36
2500		63.0	1.2	14.0	1.0	3.6	4.5	118	42.0	0.0072	0.40

# 4.06 64/110 (123) kV with Copper Wire Shield



## Copper Wire Shield

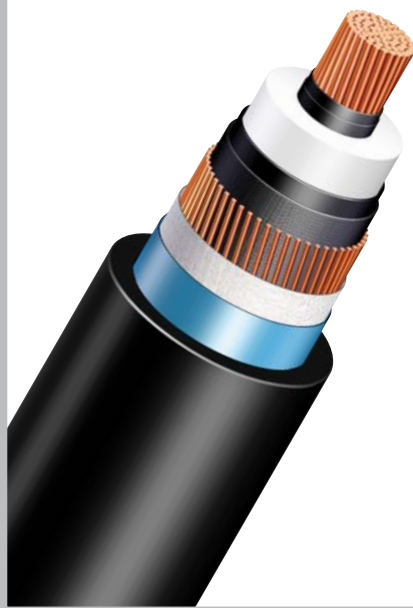

**Construction**

- Copper Conductor    ■ XLPE Insulation
- Copper Wire Shield   ■ PE (or PVC) Outer Sheath

**Continuous Current Ratings for Single Circuit (A)**

Cross-Sectional Area (mm <sup>2</sup> )	Direct Buried	Pipe Duct	In Air	
			Trefoil	Flat (S=2D)
240	528	495	605	682
300	597	559	692	783
400	681	650	800	909
500	775	739	922	1053
630	884	841	1065	1226
800	994	945	1208	1406
1000	1169	1106	1465	1695
1200	1264	1231	1595	1849
1600	1456	1415	1860	2185
2000	1618	1570	2089	2487
2500	1706	1656	2203	2623


## Constructional Data (Nominal Values)

Conductor		Diameter	Thickness of Conductor Screen Approx.	Thickness of Insulation	Thickness of Insulation Screen Approx.	Diameter & Number of Copper Wires	Thickness of Outer Sheath	Outer Diameter of Cable	Weight of Cable	Max. DC Conductor Resistance at 20°C	Capacitance
Cross-Sectional Area	Shape										
mm <sup>2</sup>		mm	mm	mm	mm	mm x No.	mm	mm	kg / m	Ω / km	μF / km
240	Compact Round Stranded	18.1	1.2	14.0	1.0	1.2 x 40	3.5	64	5.0	0.0754	0.17
300		20.4	1.2	14.0	1.0	1.2 x 40	3.5	66	5.7	0.0601	0.18
400		23.2	1.2	14.0	1.0	1.2 x 40	3.5	69	6.6	0.0470	0.20
500		26.3	1.2	14.0	1.0	1.2 x 40	4.0	73	7.9	0.0366	0.21
630		30.2	1.2	14.0	1.0	1.2 x 40	4.0	77	9.4	0.0283	0.23
800		34.0	1.2	14.0	1.0	1.2 x 40	4.0	81	11.2	0.0221	0.25
1000		38.7	1.2	14.0	1.0	1.2 x 40	4.0	86	13.6	0.0176	0.28
1200	Segment Stranded (Miliken)	41.8	1.2	14.0	1.0	1.2 x 40	4.5	91	15.6	0.0151	0.30
1600		48.1	1.2	14.0	1.0	1.2 x 40	4.5	97	19.6	0.0113	0.33
2000		54.3	1.2	14.0	1.0	1.2 x 40	4.5	103	23.7	0.0090	0.36
2500		63.0	1.2	14.0	1.0	1.2 x 40	4.5	111	29.0	0.0072	0.40

36/66 (72.5) kV  
 64/110 (123) kV  
 76/132 (145) kV  
 87/161 (170) kV  
 127/230 (245) kV  
 190/345 (362)  
 220/400 (420) kV  
 290/500 (525) kV

## 4.07 76/132 (145) kV with Aluminum Sheath

### Aluminum Sheath



**Construction**

- Copper Conductor
- XLPE Insulation
- Aluminum Sheath
- PE (or PVC) Outer Sheath

**Continuous Current Ratings for Single Circuit (A)**

Cross-Sectional Area (mm <sup>2</sup> )	Direct Buried	Pipe Duct	In Air	
			Trefoil	Flat (S=2D)
240	519	486	589	649
300	585	547	671	742
400	665	635	770	858
500	755	716	883	992
630	856	814	1011	1151
800	956	942	1137	1313
1000	1103	1093	1333	1555
1200	1185	1170	1439	1695
1600	1333	1324	1627	1972
2000	1452	1435	1777	2211
2500	1530	1512	1872	2330


### Constructional Data (Nominal Values)

Conductor			Thickness of Conductor Screen Approx.	Thickness of Insulation	Thickness of Insulation Screen Approx.	Thickness of Aluminum Sheath	Thickness of Outer Sheath	Outer Diameter of Cable	Weight of Cable	Max. DC Conductor Resistance at 20°C	Capacitance
Cross-Sectional Area	Shape	Diameter									
mm <sup>2</sup>		mm	mm	mm	mm	mm	mm	mm	kg / m	Ω / km	μF / km
240	Compact Round Stranded	18.1	1.5	16.0	1.3	1.8	4.5	83	7.1	0.0754	0.16
300		20.4	1.5	16.0	1.3	1.8	4.5	86	7.9	0.0601	0.17
400		23.2	1.5	16.0	1.3	1.9	4.5	89	8.9	0.0470	0.18
500		26.3	1.5	16.0	1.3	2.0	4.5	92	10.2	0.0366	0.20
630		30.2	1.5	16.0	1.3	2.1	4.5	97	11.9	0.0283	0.21
800		34.0	1.5	16.0	1.3	2.2	4.5	101	14.0	0.0221	0.23
1000		38.7	1.5	16.0	1.3	2.2	4.5	106	16.6	0.0176	0.25
1200	Segment Stranded (Miliken)	41.8	1.5	16.0	1.3	2.3	4.5	110	18.6	0.0151	0.27
1600		48.1	1.5	16.0	1.3	2.4	4.5	116	22.9	0.0113	0.30
2000		54.3	1.5	16.0	1.3	2.6	4.5	124	27.4	0.0090	0.32
2500		63.0	1.5	16.0	1.3	2.8	4.5	131	34.3	0.0072	0.36

# 4.08 76/132 (145) kV with Lead Sheath



## Lead Sheath



### Construction

- Copper Conductor    ■ XLPE Insulation
- Lead Sheath            ■ PE (or PVC) Outer Sheath

### Continuous Current Ratings for Single Circuit (A)

Cross-Sectional Area (mm <sup>2</sup> )	Direct Buried	Pipe Duct	In Air	
			Trefoil	Flat (S=2D)
240	530	495	612	679
300	600	559	702	781
400	684	636	808	904
500	780	727	934	1050
630	889	840	1077	1222
800	997	941	1222	1400
1000	1170	1100	1469	1681
1200	1264	1226	1599	1842
1600	1449	1404	1853	2168
2000	1600	1548	2064	2460
2500	1686	1631	2175	2592


## Constructional Data (Nominal Values)

Conductor			Thickness of Conductor Screen Approx.	Thickness of Insulation	Thickness of Insulation Screen Approx.	Thickness of Lead Sheath	Thickness of Outer Sheath	Outer Diameter of Cable	Weight of Cable	Max. DC Conductor Resistance at 20°C	Capacitance
Cross-Sectional Area	Shape	Diameter									
mm <sup>2</sup>		mm	mm	mm	mm	mm	mm	mm	kg / m	Ω / km	μF / km
240	Compact Round Stranded	18.1	1.5	16.0	1.3	2.4	4.5	76	11.2	0.0754	0.16
300		20.4	1.5	16.0	1.3	2.5	4.5	78	12.3	0.0601	0.17
400		23.2	1.5	16.0	1.3	2.6	4.5	81	13.8	0.0470	0.18
500		26.3	1.5	16.0	1.3	2.7	4.5	85	15.6	0.0366	0.20
630		30.2	1.5	16.0	1.3	2.7	4.5	88	17.5	0.0283	0.21
800		34.0	1.5	16.0	1.3	2.9	4.5	93	20.4	0.0221	0.23
1000		38.7	1.5	16.0	1.3	3.0	4.5	98	23.6	0.0176	0.25
1200	Segment Stranded (Miliken)	41.8	1.5	16.0	1.3	3.1	4.5	102	26.5	0.0151	0.27
1600		48.1	1.5	16.0	1.3	3.3	4.5	108	31.7	0.0113	0.30
2000		54.3	1.5	16.0	1.3	3.5	4.5	115	37.7	0.0090	0.32
2500		63.0	1.5	16.0	1.3	3.7	4.5	123	44.3	0.0072	0.36

36/66 (72.5) kV  
 64/110 (123) kV  
 76/132 (145) kV  
 87/161 (170) kV  
 127/230 (245) kV  
 190/345 (362) kV  
 220/400 (420) kV  
 290/500 (525) kV

## 4.09 76/132 (145) kV with Copper Wire Shield

### Copper Wire Shield

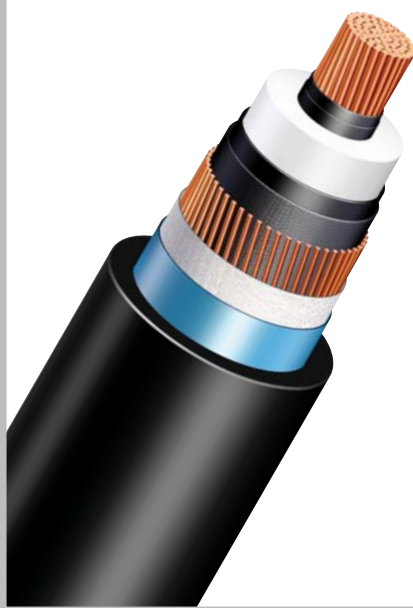

**Construction**

- Copper Conductor
- XLPE Insulation
- Copper Wire Shield
- PE (or PVC) Outer Sheath

**Continuous Current Ratings for Single Circuit (A)**

Cross-Sectional Area (mm <sup>2</sup> )	Direct Buried	Pipe Duct	In Air	
			Trefoil	Flat (S=2D)
240	525	492	601	673
300	593	555	688	774
400	675	632	792	896
500	767	716	908	1033
630	872	811	1045	1200
800	979	932	1182	1374
1000	1145	1087	1420	1649
1200	1233	1212	1539	1801
1600	1414	1388	1784	2125
2000	1569	1532	2003	2418
2500	1653	1614	2111	2548


### Constructional Data (Nominal Values)

Cross-Sectional Area	Conductor		Thickness of Conductor Screen Approx.	Thickness of Insulation	Thickness of Insulation Screen Approx.	Diameter & Number of Copper Wires	Thickness of Outer Sheath	Outer Diameter of Cable	Weight of Cable	Max. DC Conductor Resistance at 20°C	Capacitance
	Shape	Diameter									
mm <sup>2</sup>		mm	mm	mm	mm	mm x No.	mm	mm	kg / m	Ω / km	μF / km
240	Compact Round Stranded	18.1	1.5	16.0	1.3	1.5 x 80	4.5	70	6.5	0.0754	0.16
300		20.4	1.5	16.0	1.3	1.5 x 80	4.5	72	7.1	0.0601	0.17
400		23.2	1.5	16.0	1.3	1.5 x 80	4.5	75	8.1	0.0470	0.18
500		26.3	1.5	16.0	1.3	1.5 x 80	4.5	80	9.5	0.0366	0.20
630		30.2	1.5	16.0	1.3	1.5 x 80	4.5	84	11.0	0.0283	0.21
800		34.0	1.5	16.0	1.3	1.5 x 80	4.5	88	12.9	0.0221	0.23
1000		38.7	1.5	16.0	1.3	1.5 x 80	4.5	93	15.3	0.0176	0.25
1200	Segment Stranded (Miliken)	41.8	1.5	16.0	1.3	1.5 x 80	4.5	96	17.1	0.0151	0.27
1600		48.1	1.5	16.0	1.3	1.5 x 80	4.5	102	21.2	0.0113	0.30
2000		54.3	1.5	16.0	1.3	1.5 x 80	4.5	110	25.8	0.0090	0.32
2500		63.0	1.5	16.0	1.3	1.5 x 80	4.5	118	31.4	0.0072	0.36

# 4.10 87/161 (170) kV with Aluminum Sheath



## Aluminum Sheath

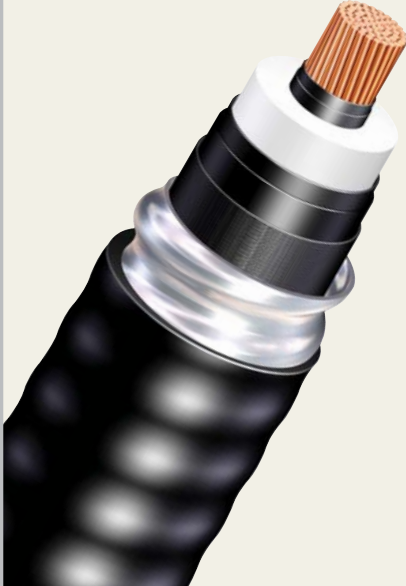

### Construction

- Copper Conductor    ■ XLPE Insulation
- Aluminum Sheath    ■ PE (or PVC) Outer Sheath

### Continuous Current Ratings for Single Circuit (A)

Cross-Sectional Area (mm <sup>2</sup> )	Direct Buried	Pipe Duct	In Air	
			Trefoil	Flat (S=2D)
300	584	558	669	740
400	664	634	768	855
500	754	718	879	988
630	853	811	1009	1146
800	953	938	1134	1307
1000	1100	1087	1328	1548
1200	1179	1163	1429	1684
1600	1331	1311	1627	1967
2000	1447	1485	1774	2199
2500	1523	1563	1868	2315


## Constructional Data (Nominal Values)

Conductor			Thickness of Conductor Screen Approx.	Thickness of Insulation	Thickness of Insulation Screen Approx.	Thickness of Aluminum Sheath	Thickness of Outer Sheath	Outer Diameter of Cable	Weight of Cable	Max. DC Conductor Resistance at 20°C	Capacitance
Cross-Sectional Area	Shape	Diameter									
mm <sup>2</sup>		mm	mm	mm	mm	mm	mm	mm	kg / m	Ω / km	μF / km
300	Compact Round Stranded	20.4	1.5	17	1.3	1.9	4.5	87	8.4	0.0601	0.16
400		23.2	1.5	17	1.3	1.9	4.5	91	9.4	0.0470	0.18
500		26.3	1.5	17	1.3	2.0	4.5	94	10.7	0.0366	0.19
630		30.2	1.5	17	1.3	2.1	4.5	98	12.3	0.0283	0.21
800		34.0	1.5	17	1.3	2.2	4.5	102	14.4	0.0221	0.22
1000	Segment Stranded (Miliken)	38.7	1.5	17	1.3	2.3	4.5	108	17.0	0.0176	0.24
1200		41.8	1.5	17	1.3	2.3	4.5	111	19.0	0.0151	0.26
1600		48.1	1.5	17	1.3	2.5	4.5	119	23.5	0.0113	0.28
2000		54.3	1.5	17	1.3	2.6	4.5	125	28.0	0.0090	0.31
2500		63.0	1.5	17	1.3	2.8	4.5	134	34.5	0.0072	0.34

36/66 (72.5) kV  
 64/110 (123) kV  
 76/132 (145) kV  
 87/161 (170) kV  
 127/230 (245) kV  
 190/345 (362) kV  
 220/400 (420) kV  
 290/500 (525) kV

## 4.11 87/161 (170) kV with Lead Sheath

### Lead Sheath



**Construction**

- Copper Conductor
- XLPE Insulation
- Lead Sheath
- PE (or PVC) Outer Sheath

**Continuous Current Ratings for Single Circuit (A)**


Cross-Sectional Area (mm <sup>2</sup> )	Direct Buried	Pipe Duct	In Air	
			Trefoil	Flat (S=2D)
300	598	557	698	775
400	682	648	805	898
500	777	736	928	1042
630	886	836	1073	1214
800	996	939	1218	1391
1000	1168	1131	1464	1670
1200	1259	1221	1589	1825
1600	1445	1398	1845	2152
2000	1597	1541	2060	2445
2500	1681	1622	2169	2574

### Constructional Data (Nominal Values)

Cross-Sectional Area	Conductor		Thickness of Conductor Screen Approx.	Thickness of Insulation	Thickness of Insulation Screen Approx.	Thickness of Lead Sheath	Thickness of Outer Sheath	Outer Diameter of Cable	Weight of Cable	Max. DC Conductor Resistance at 20°C	Capacitance
	Shape	Diameter									
mm <sup>2</sup>		mm	mm	mm	mm	mm	mm	mm	kg / m	Ω / km	μF / km
300	Compact Round Stranded	20.4	1.5	17	1.3	2.5	4.5	80	12.5	0.0601	0.16
400		23.2	1.5	17	1.3	2.6	4.5	83	14.0	0.0470	0.18
500		26.3	1.5	17	1.3	2.7	4.5	86	15.7	0.0366	0.19
630		30.2	1.5	17	1.3	2.8	4.5	90	18.0	0.0283	0.21
800		34.0	1.5	17	1.3	2.9	4.5	94	20.5	0.0221	0.22
1000	Segment Stranded (Miliken)	38.7	1.5	17	1.3	3.0	4.5	100	23.8	0.0176	0.24
1200		41.8	1.5	17	1.3	3.2	4.5	103	26.7	0.0151	0.26
1600		48.1	1.5	17	1.3	3.4	4.5	110	32.2	0.0113	0.28
2000		54.3	1.5	17	1.3	3.6	4.5	116	37.9	0.0090	0.31
2500		63.0	1.5	17	1.3	3.7	4.5	124	44.9	0.0072	0.34

## 4.12 87/161 (170) kV with Copper Wire Shield

### Copper Wire Shield

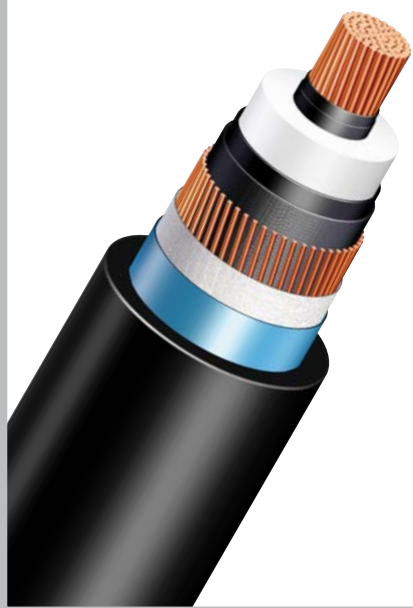

**Construction**

- Copper Conductor
- XLPE Insulation
- Copper Wire Shield
- PE (or PVC) Outer Sheath

**Continuous Current Ratings for Single Circuit (A)**

Cross-Sectional Area (mm <sup>2</sup> )	Direct Buried	Pipe Duct	In Air	
			Trefoil	Flat (S=2D)
300	591	553	684	765
400	673	629	789	887
500	766	713	907	1027
630	871	829	1043	1193
800	977	928	1181	1367
1000	1143	1081	1415	1639
1200	1232	1208	1535	1790
1600	1404	1382	1765	2100
2000	1554	1523	1973	2384
2500	1636	1603	2077	2510


### Constructional Data (Nominal Values)

Cross-Sectional Area	Conductor		Thickness of Conductor Screen Approx.	Thickness of Insulation	Thickness of Insulation Screen Approx.	Diameter & Number of Copper Wires	Thickness of Outer Sheath	Outer Diameter of Cable	Weight of Cable	Max. DC Conductor Resistance at 20°C	Capacitance
	Shape	Diameter									
mm <sup>2</sup>		mm	mm	mm	mm	mm x No.	mm	mm	kg / m	Ω / km	μF / km
300	Compact Round Stranded	20.4	1.5	17	1.3	1.5 x 80	4.5	72	6.3	0.0601	0.21
400		23.2	1.5	17	1.3	1.5 x 80	4.5	75	7.2	0.0470	0.23
500		26.3	1.5	17	1.3	1.5 x 80	4.5	79	8.6	0.0366	0.25
630		30.2	1.5	17	1.3	1.5 x 80	4.5	83	10.1	0.0283	0.28
800		34.0	1.5	17	1.3	1.5 x 80	4.5	87	12.0	0.0221	0.30
1000	Segment Stranded (Miliken)	38.7	1.5	17	1.3	1.5 x 80	4.5	92	14.4	0.0176	0.33
1200		41.8	1.5	17	1.3	1.5 x 80	4.5	98	16.7	0.0151	0.36
1600		48.1	1.5	17	1.3	1.5 x 80	4.5	105	20.9	0.0113	0.40
2000		54.3	1.5	17	1.3	1.5 x 80	4.5	112	25.4	0.0090	0.44
2500		63.0	1.5	17	1.3	1.5 x 80	4.5	118	31.1	0.0072	0.34

36/66 (72.5) kV  
64/110 (123) kV  
76/132 (145) kV  
87/161 (170) kV  
127/230 (245) kV  
190/345 (362)  
220/400 (420) kV  
290/500 (525) kV

## 4.13 127/230 (245) kV with Aluminum Sheath

### Aluminum Sheath



**Construction**

- Copper Conductor
- XLPE Insulation
- Aluminum Sheath
- PE (or PVC) Outer Sheath

**Continuous Current Ratings for Single Circuit (A)**


Cross-Sectional Area (mm <sup>2</sup> )	Direct Buried	Pipe Duct	In Air	
			Trefoil	Flat (S=2D)
400	657	641	757	836
500	745	725	866	962
630	843	822	989	1111
800	943	916	1116	1268
1000	1090	1057	1310	1505
1200	1165	1131	1403	1631
1600	1316	1322	1596	1902
2000	1438	1440	1758	2143
2500	1512	1514	1849	2254

### Constructional Data (Nominal Values)

Conductor			Thickness of Conductor Screen Approx.	Thickness of Insulation	Thickness of Insulation Screen Approx.	Thickness of Aluminum Sheath	Thickness of Outer Sheath	Outer Diameter of Cable	Weight of Cable	Max. DC Conductor Resistance at 20°C	Capacitance
Cross-Sectional Area	Shape	Diameter									
mm <sup>2</sup>		mm	mm	mm	mm	mm	mm	mm	kg / m	Ω / km	μF / km
400	Compact Round Stranded	23.2	1.5	23.0	1.3	2.2	4.5	104	11.0	0.0470	0.14
500		26.3	1.5	23.0	1.3	2.3	4.5	108	12.1	0.0366	0.15
630		30.2	1.5	23.0	1.3	2.4	4.5	112	14.2	0.0283	0.17
800		34.0	1.5	23.0	1.3	2.4	4.5	116	15.8	0.0221	0.18
1000	Segment Stranded (Miliken)	34.0	1.5	23.0	1.3	2.4	4.5	116	15.8	0.0221	0.18
1200		41.8	1.5	23.0	1.3	2.6	5.0	126	21.5	0.0151	0.21
1600		48.1	1.5	23.0	1.3	2.7	5.0	133	26.0	0.0113	0.23
2000		54.3	1.5	23.0	1.3	2.8	5.0	139	30.7	0.0090	0.24
2500		63.0	1.5	23.0	1.3	3.0	5.0	148	37.8	0.0072	0.27

## 4.14 127/230 (245) kV with Lead Sheath

### Lead Sheath



**Construction**

- Copper Conductor
- XLPE Insulation
- Lead Sheath
- PE (or PVC) Outer Sheath

**Continuous Current Ratings for Single Circuit (A)**


Cross-Sectional Area (mm <sup>2</sup> )	Direct Buried	Pipe Duct	In Air	
			Trefoil	Flat (S=2D)
400	676	638	793	871
500	770	745	914	1010
630	876	847	1054	1173
800	986	950	1196	1343
1000	1153	1108	1429	1606
1200	1243	1194	1552	1757
1600	1424	1401	1797	2068
2000	1571	1545	2004	2342
2500	1652	1625	2108	2463

### Constructional Data (Nominal Values)

Cross-Sectional Area	Conductor		Thickness of Conductor Screen Approx.	Thickness of Insulation	Thickness of Insulation Screen Approx.	Thickness of Lead Sheath	Thickness of Outer Sheath	Outer Diameter of Cable	Weight of Cable	Max. DC Conductor Resistance at 20°C	Capacitance
	Shape	Diameter									
mm <sup>2</sup>		mm	mm	mm	mm	mm	mm	mm	kg / m	Ω / km	μF / km
400	Compact Round Stranded	23.2	1.5	23.0	1.3	3.2	4.5	96	17.9	0.0470	0.14
500		26.3	1.5	23.0	1.3	3.3	4.5	100	19.7	0.0366	0.15
630		30.2	1.5	23.0	1.3	3.4	4.5	104	22.1	0.0283	0.17
800		34.0	1.5	23.0	1.3	3.5	4.5	108	24.8	0.0221	0.18
1000	Segment Stranded (Miliken)	38.7	1.5	23.0	1.3	3.6	5.0	114	28.8	0.0176	0.20
1200		41.8	1.5	23.0	1.3	3.9	5.0	118	32.3	0.0151	0.21
1600		48.1	1.5	23.0	1.3	4.1	5.0	124	38.2	0.0113	0.23
2000		54.3	1.5	23.0	1.3	4.2	5.0	130	43.8	0.0090	0.24
2500		63.0	1.5	23.0	1.3	4.4	5.0	148	52.5	0.0072	0.27

# 4.15 127/230 (245) kV with Copper Wire Shield

## Copper Wire Shield



**Construction**

- Copper Conductor    ■ XLPE Insulation
- Copper Wire Shield   ■ PE (or PVC) Outer Sheath

**Continuous Current Ratings for Single Circuit (A)**


Cross-Sectional Area (mm <sup>2</sup> )	Direct Buried	Pipe Duct	In Air	
			Trefoil	Flat (S=2D)
400	668	634	779	863
500	759	719	895	998
630	864	842	1031	1159
800	970	944	1167	1326
1000	1131	1100	1390	1583
1200	1221	1185	1512	1733
1600	1397	1354	1750	2040
2000	1543	1489	1950	2309
2500	1623	1566	2051	2429

## Constructional Data (Nominal Values)

Cross-Sectional Area	Conductor		Thickness of Conductor Screen Approx.	Thickness of Insulation	Thickness of Insulation Screen Approx.	Diameter & Number of Copper Wires	Thickness of Outer Sheath	Outer Diameter of Cable	Weight of Cable	Max. DC Conductor Resistance at 20°C	Capacitance
	Shape	Diameter									
mm <sup>2</sup>		mm	mm	mm	mm	mm x No.	mm	mm	kg / m	Ω / km	μF / km
400	Compact Round Stranded	23.2	1.5	23.0	1.3	1.5 x 80	4.5	91	10.0	0.0470	0.14
500		26.3	1.5	23.0	1.3	1.5 x 80	4.5	94	11.2	0.0366	0.15
630		30.2	1.5	23.0	1.3	1.5 x 80	4.5	98	12.8	0.0283	0.17
800		34.0	1.5	23.0	1.3	1.5 x 80	4.5	102	14.8	0.0221	0.18
1000	Segment Stranded (Miliken)	38.7	1.5	23.0	1.3	1.5 x 80	5.0	107	17.2	0.0176	0.20
1200		41.8	1.5	23.0	1.3	1.5 x 80	5.0	110	19.2	0.0151	0.21
1600		48.1	1.5	23.0	1.3	1.5 x 80	5.0	116	23.3	0.0113	0.23
2000		54.3	1.5	23.0	1.3	1.5 x 80	5.0	123	27.6	0.0090	0.24
2500		63.0	1.5	23.0	1.3	1.5 x 80	5.0	132	33.9	0.0072	0.27

## 4.16 190/345 (362) kV with Aluminum Sheath

### Aluminum Sheath



**Construction**

- Copper Conductor
- XLPE Insulation
- Aluminum Sheath
- PE (or PVC) Outer Sheath

**Continuous Current Ratings for Single Circuit (A)**

Cross-Sectional Area (mm <sup>2</sup> )	Direct Buried	Pipe Duct	In Air	
			Trefoil	Flat (S=2D)
630	832	822	976	1092
800	928	917	1095	1239
1000	1072	1060	1284	1467
1200	1149	1136	1383	1595
1600	1299	1325	1577	1859
2000	1419	1446	1726	2089
2500	1491	1519	1814	2195

### Constructional Data (Nominal Values)

Cross-Sectional Area	Conductor		Thickness of Conductor Screen Approx.	Thickness of Insulation	Thickness of Insulation Screen Approx.	Thickness of Aluminum Sheath	Thickness of Outer Sheath	Outer Diameter of Cable	Weight of Cable	Max. DC Conductor Resistance at 20°C	Capacitance
	Shape	Diameter									
mm <sup>2</sup>		mm	mm	mm	mm	mm	mm	mm	kg / m	Ω / km	μF / km
630	Compact Round Stranded	30.2	1.5	27.0	1.3	2.5	6	124	16.5	0.0283	0.15
800		34.0	1.5	27.0	1.3	2.6	6	128	18.7	0.0221	0.16
1000	Segment Stranded (Miliken)	38.7	1.5	27.0	1.3	2.7	6	134	21.6	0.0176	0.18
1200		41.8	1.5	27.0	1.3	2.8	6	137	23.8	0.0151	0.19
1600		48.1	1.5	27.0	1.3	2.9	6	144	28.4	0.0113	0.20
2000		54.3	1.5	27.0	1.3	3.0	6	150	33.1	0.0090	0.22
2500		63.0	1.5	27.0	1.3	3.2	6	160	40.5	0.0072	0.24

36/66 (72.5) kV

64/110 (123) kV

76/132 (145) kV

87/161 (170) kV

127/230 (245) kV


190/345 (362)

220/400 (420) kV

290/500 (525) kV

## 4.17 190/345 (362) kV with Lead Sheath

### Lead Sheath



**Construction**

- Copper Conductor
- XLPE Insulation
- Lead Sheath
- PE (or PVC) Outer Sheath

**Continuous Current Ratings for Single Circuit (A)**

Cross-Sectional Area (mm <sup>2</sup> )	Direct Buried	Pipe Duct	In Air	
			Trefoil	Flat (S=2D)
630	862	828	1032	1141
800	970	936	1173	1305
1000	1133	1107	1399	1561
1200	1222	1193	1520	1706
1600	1400	1364	1764	2009
2000	1541	1540	1961	2270
2500	1619	1618	2061	2385


### Constructional Data (Nominal Values)

Cross-Sectional Area	Conductor		Thickness of Conductor Screen Approx.	Thickness of Insulation	Thickness of Insulation Screen Approx.	Thickness of Lead Sheath	Thickness of Outer Sheath	Outer Diameter of Cable	Weight of Cable	Max. DC Conductor Resistance at 20°C	Capacitance
	Shape	Diameter									
mm <sup>2</sup>		mm	mm	mm	mm	mm	mm	mm	kg / m	Ω / km	μF / km
630	Compact Round Stranded	30.2	1.5	27.0	1.3	3.4	6.0	113	23.5	0.0283	0.15
800		34.0	1.5	27.0	1.3	3.5	6.0	118	27.3	0.0221	0.16
1000	Segment Stranded (Miliken)	38.7	1.5	27.0	1.3	3.6	6.0	123	30.7	0.0176	0.18
1200		41.8	1.5	27.0	1.3	3.8	6.0	127	33.8	0.0151	0.19
1600		48.1	1.5	27.0	1.3	4.0	6.0	133	40.3	0.0113	0.20
2000		54.3	1.5	27.0	1.3	4.2	6.0	140	46.7	0.0090	0.22
2500		63.0	1.5	27.0	1.3	4.4	6.0	148	55.3	0.0072	0.24

# 4.18 220/400 (420) kV with Aluminum Sheath



## Aluminum Sheath

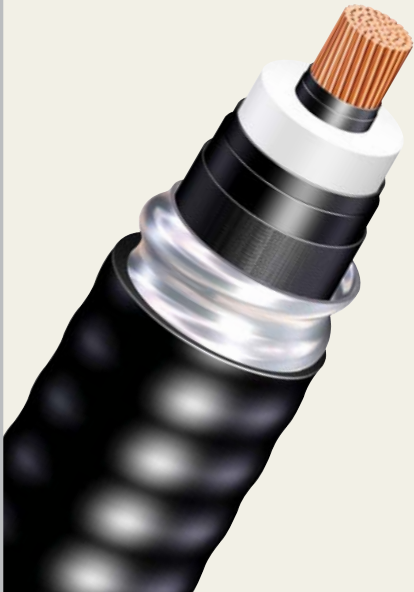

### Construction

- Copper Conductor    ■ XLPE Insulation
- Aluminum Sheath    ■ PE (or PVC) Outer Sheath

### Continuous Current Ratings for Single Circuit (A)

Cross-Sectional Area (mm <sup>2</sup> )	Direct Buried	Pipe Duct	In Air	
			Trefoil	Flat (S=2D)
630	825	812	967	1081
800	920	907	1090	1231
1000	1062	1046	1279	1458
1200	1139	1120	1372	1581
1600	1292	1304	1569	1842
2000	1410	1422	1711	2067
2500	1480	1493	1796	2170
3000	1570	1582	1904	2300


## Constructional Data (Nominal Values)

Conductor			Thickness of Conductor Screen Approx.	Thickness of Insulation	Thickness of Insulation Screen Approx.	Thickness of Aluminum Sheath	Thickness of Outer Sheath	Outer Diameter of Cable	Weight of Cable	Max. DC Conductor Resistance at 20°C	Capacitance
Cross-Sectional Area	Shape	Diameter									
mm <sup>2</sup>		mm	mm	mm	mm	mm	mm	mm	kg / m	Ω / km	μF / km
630	Compact Round Stranded	30.2	1.5	29.0	1.3	2.6	6	128	17.5	0.0283	0.14
800		34.0	1.5	29.0	1.3	2.7	6	132	19.6	0.0221	0.15
1000		38.7	1.5	29.0	1.3	2.8	6	138	22.5	0.0176	0.17
1200	Segment Stranded (Miliken)	41.8	1.5	29.0	1.3	2.8	6	141	24.6	0.0151	0.18
1600		48.1	1.5	29.0	1.3	3.0	6	150	29.9	0.0113	0.19
2000		54.3	1.5	29.0	1.3	3.1	6	157	34.7	0.0090	0.20
2500		63.0	1.5	29.0	1.3	3.3	6	167	42.0	0.0072	0.23
3000		69.0	1.5	29.0	1.3	3.3	6	174	46.7	0.0060	0.24

36/66 (72.5) kV  
 64/110 (123) kV  
 76/132 (145) kV  
 87/161 (170) kV  
 127/230 (245) kV  
 190/345 (362)  
 220/400 (420) kV  
 290/500 (525) kV

## 4.19 220/400 (420) kV with Lead Sheath

### Lead Sheath



**Construction**

- Copper Conductor
- XLPE Insulation
- Lead Sheath
- PE (or PVC) Outer Sheath

**Continuous Current Ratings for Single Circuit (A)**

Cross-Sectional Area (mm <sup>2</sup> )	Direct Buried	Pipe Duct	In Air	
			Trefoil	Flat (S=2D)
630	856	819	1024	1131
800	960	925	1161	1291
1000	1122	1093	1385	1542
1200	1208	1178	1501	1683
1600	1380	1375	1734	1971
2000	1520	1513	1926	2231
2500	1596	1588	2022	2342
3000	1691	1683	2143	2483


### Constructional Data (Nominal Values)

Cross-Sectional Area	Conductor		Thickness of Conductor Screen Approx.	Thickness of Insulation	Thickness of Insulation Screen Approx.	Thickness of Lead Sheath	Thickness of Outer Sheath	Outer Diameter of Cable	Weight of Cable	Max. DC Conductor Resistance at 20°C	Capacitance
	Shape	Diameter									
mm <sup>2</sup>		mm	mm	mm	mm	mm	mm	mm	kg / m	Ω / km	μF / km
630	Compact Round Stranded	30.2	1.5	29.0	1.3	3.5	6.0	118	27.0	0.0283	0.14
800		34.0	1.5	29.0	1.3	3.6	6.0	122	28.6	0.0221	0.15
1000		38.7	1.5	29.0	1.3	3.8	6.0	127	33.5	0.0176	0.17
1200		41.8	1.5	29.0	1.3	3.9	6.0	131	36.0	0.0151	0.18
1600	Segment Stranded (Miliken)	48.1	1.5	29.0	1.3	4.2	6.0	140	43.1	0.0113	0.19
2000		54.3	1.5	29.0	1.3	4.4	6.0	146	50.0	0.0090	0.20
2500		63.0	1.5	29.0	1.3	4.5	6.0	153	57.0	0.0072	0.23
3000		69.0	1.5	29.0	1.3	3.3	6.0	174	64.1	0.0060	0.24

## 4.20 290/500 (525) kV with Aluminum Sheath



### Aluminum Sheath

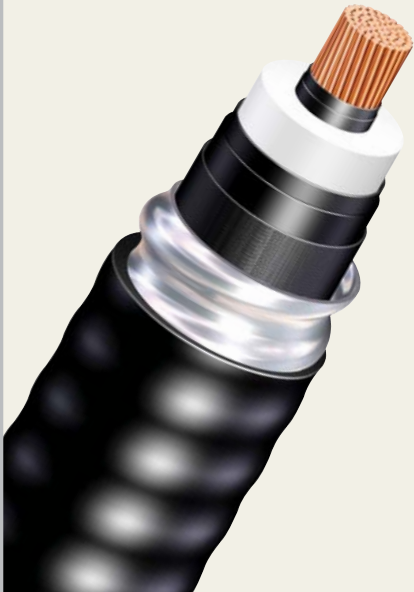

**Construction**

- Copper Conductor    ■ XLPE Insulation
- Aluminum Sheath    ■ PE (or PVC) Outer Sheath

**Continuous Current Ratings for Single Circuit (A)**

Cross-Sectional Area (mm <sup>2</sup> )	Direct Buried	Pipe Duct	In Air	
			Trefoil	Flat (S=2D)
800	910	890	1080	1221
1000	1052	1036	1270	1447
1200	1128	1110	1361	1565
1600	1281	1284	1555	1825
2000	1400	1400	1700	2050
2500	1470	1470	1785	2150
3000	1560	1558	1895	2280


### Constructional Data (Nominal Values)

Conductor			Thickness of Conductor Screen Approx.	Thickness of Insulation	Thickness of Insulation Screen Approx.	Thickness of Aluminum Sheath	Thickness of Outer Sheath	Outer Diameter of Cable	Weight of Cable	Max. DC Conductor Resistance at 20°C	Capacitance
Cross-Sectional Area	Shape	Diameter									
mm <sup>2</sup>		mm	mm	mm	mm	mm	mm	mm	kg / m	Ω / km	μF / km
800	Compact Round Stranded	34.0	2.5	34.0	2.0	3.0	6	148	24.6	0.0221	0.14
1000		38.7	2.5	32.0	2.0	3.0	6	146	26.2	0.0176	0.16
1200		41.8	2.0	32.0	2.0	3.0	6	150	28.6	0.0151	0.16
1600	Segment Stranded (Miliken)	48.1	2.0	30.0	2.0	3.1	6	153	32.1	0.0113	0.19
2000		54.3	2.0	30.0	2.0	3.2	6	158	36.8	0.0090	0.20
2500		63.0	2.0	30.0	2.0	3.3	6	168	43.6	0.0072	0.23
3000		69.0	2.0	30.0	2.0	3.5	6	178	48.8	0.0060	0.24

36/66 (72.5) kV  
 64/110 (123) kV  
 76/132 (145) kV  
 87/161 (170) kV  
 127/230 (245) kV  
 190/345 (362)  
 220/400 (420) kV  
 290/500 (525) kV

## 4.21 290/500 (525) kV with Lead Sheath

### Lead Sheath



**Construction**

- Copper Conductor
- XLPE Insulation
- Lead Sheath
- PE (or PVC) Outer Sheath

**Continuous Current Ratings for Single Circuit (A)**

Cross-Sectional Area (mm <sup>2</sup> )	Direct Buried	Pipe Duct	In Air	
			Trefoil	Flat (S=2D)
800	950	915	1151	1280
1000	1110	1082	1375	1522
1200	1188	1167	1475	1658
1600	1360	1360	1710	1946
2000	1500	1495	1900	2206
2500	1575	1570	1995	2316
3000	1670	1665	2115	2455

### Constructional Data (Nominal Values)

Cross-Sectional Area	Conductor		Thickness of Conductor Screen Approx.	Thickness of Insulation	Thickness of Insulation Screen Approx.	Thickness of Aluminum Sheath	Thickness of Outer Sheath	Outer Diameter of Cable	Weight of Cable	Max. DC Conductor Resistance at 20°C	Capacitance
	Shape	Diameter									
mm <sup>2</sup>		mm	mm	mm	mm	mm	mm	mm	kg/m	Ω/km	μF/km
800	Compact Round Stranded	34.0	2.5	34.0	2.0	4.3	6.0	136	37.5	0.0221	0.14
1000		38.7	2.5	32.0	2.0	4.3	6.0	134	38.7	0.0176	0.16
1200		41.8	2.0	32.0	2.0	4.4	6.0	137	41.6	0.0151	0.16
1600	Segment Stranded (Miliken)	48.1	2.0	30.0	2.0	4.5	6.0	140	46.0	0.0113	0.19
2000		54.3	2.0	30.0	2.0	4.5	6.0	147	51.7	0.0090	0.20
2500		63.0	2.0	30.0	2.0	4.9	6.0	154	60.0	0.0072	0.23
3000		69.0	2.0	30.0	2.0	5.1	6.0	162	68.1	0.0060	0.24