
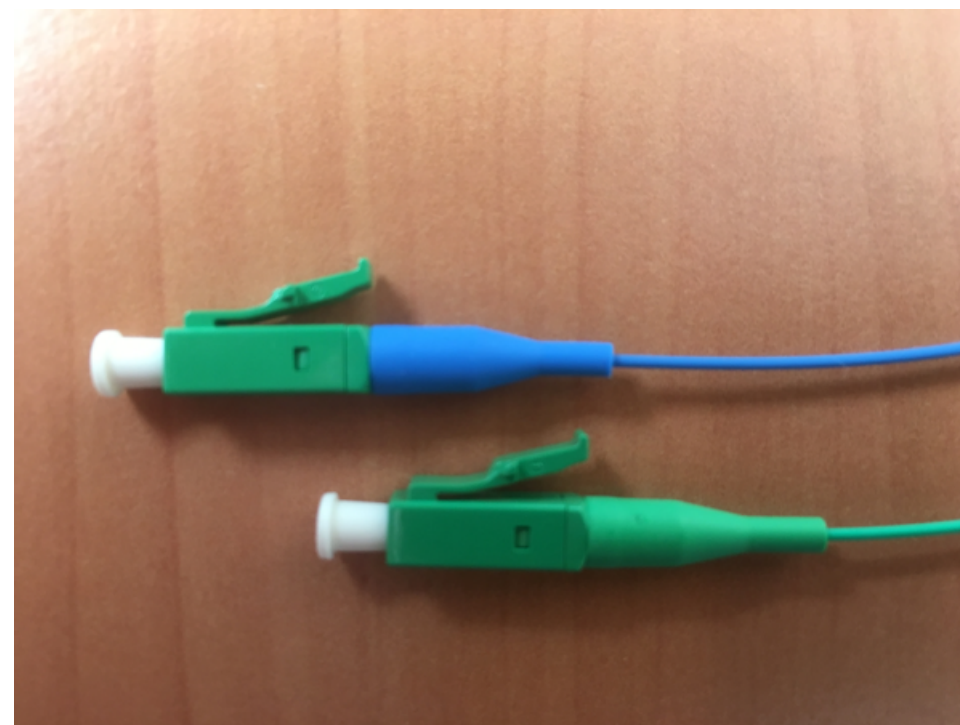


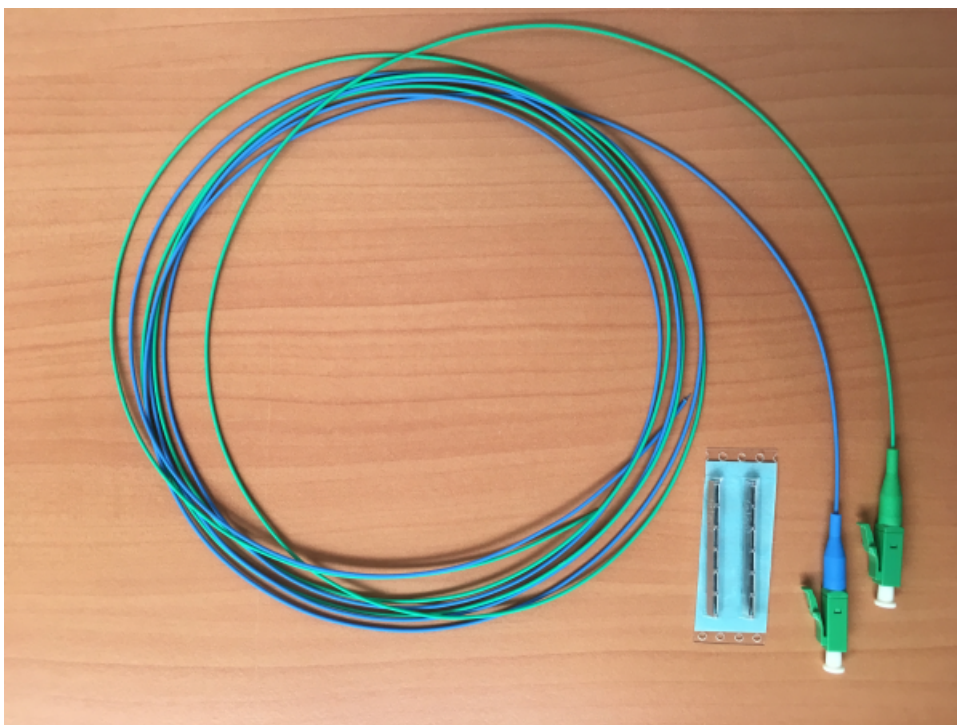

#### Connector 1

Connector Type LC/APC 8°, according IEC 61754  
 Color: Green / Green  
 Ferrule Zirconia Grade C  
 Insertion loss avg = 0,25 dB  
 97%  $\leq$  0,5 dB, random mated  
 100 %  $\leq$  0,7 dB, random mated  
 100 %  $\leq$  0,3 dB, against reference connector  
 Return loss Typ.  $\geq$  65 dB, Min  $\geq$  65 dB  
 Temperature range -25 °C t/m +70 °C

#### Connector 2

Connector Type LC/APC 8°, according IEC 61754  
 Color: Green / Blue  
 Ferrule Zirconia Grade C  
 Insertion loss avg = 0,25 dB  
 97%  $\leq$  0,5 dB, random mated  
 100 %  $\leq$  0,7 dB, random mated  
 100 %  $\leq$  0,3 dB, against reference connector  
 Return loss Typ.  $\geq$  65 dB, Min  $\geq$  65 dB  
 Temperature range -25 °C t/m +70 °C

#### Pigtailcord

Cord-diameter: 0,9 mm  
 Type: Semi-Tight buffered  
 Fiber: ITU-T G.657A1  
 Sheath: Green and Blue LSZH.  
 Length: 1,5 meter

Temperature range including connector -25 °C t/m +70 °C

LGCE  
 Energieweg 19  
 3281 NH Numansdorp  
 the Netherlands  
 Tel: +31 18 665 95 10  
 E-mail: infor@lgce.net



|              |                        |  |
|--------------|------------------------|--|
| Date signed: | 01/02/2018             |  |
| Drawn by:    | AR/LGCE                |  |
|              | Rev. 1.0a              |  |
| Art:         | WA SET DG COLORED TULE |  |
|              |                        |  |
|              |                        |  |