

DATASHEET

Compact Fiber Dome

Article number: 29017

Product description

The Compact Fiber Dome is used to connect, repair or extend the direct buried Fiber to the Home subscriber drop cable.

Suitable for 1 cable in and 1 cable out up to max 2 optical fibers. R = 22,5mm.

Cable diameters: Ø 5 mm – Ø 6,5mm


Splice tray capacity:

2 splice protectors ANT/mini heatshrink or

2 splice protectors heatshrink Ø 2,4 mm x 45 mm.

Features and Benefit

- Easy to install
- Universal applicable
- Suitable for splice protectors ANT, miniheatshrink or heatshrink Ø2,4mm x 45mm
- Orderly assembly sequence
- Integrated cable retention
- Box dimensions 590 x 390 x 200mm
- Ingress protection IP68
- Impact resistant
- Halogen-free

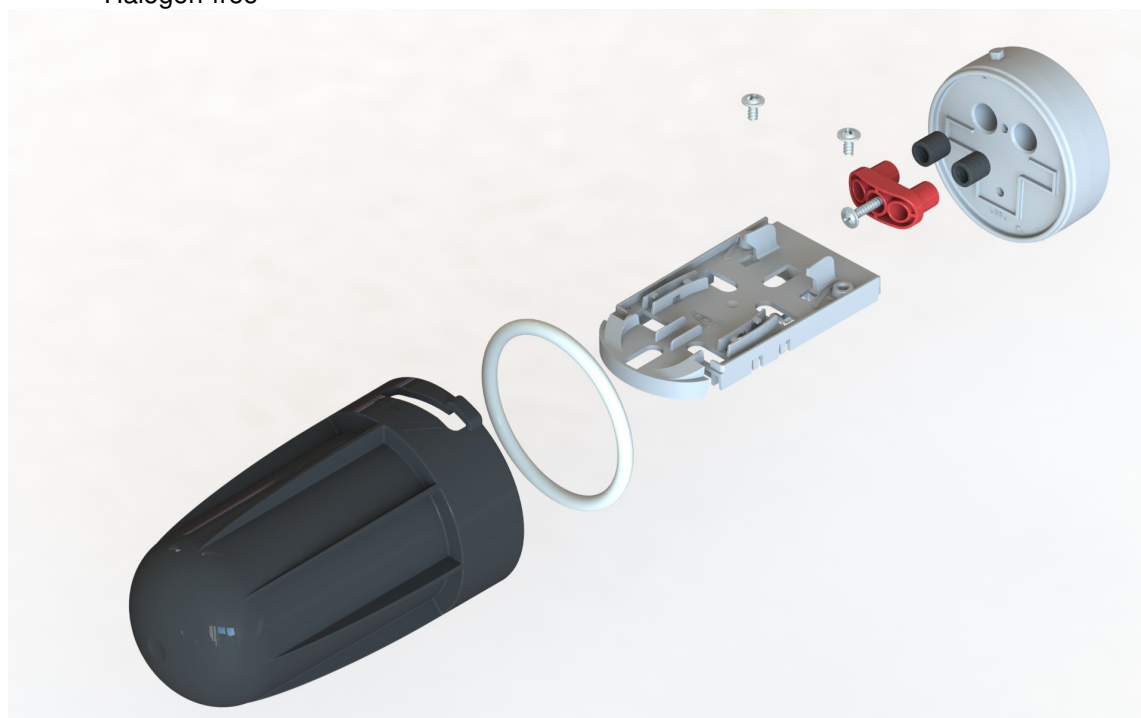

Colours

Lid : Black

Base : Light grey

Article number

29017: Compact fiber dome

Packaging

Compact fiber domes per cardboard: 25 pcs
 EAN-number: 8712259325132
 Cardboard dimensions: 590 x 390 x 200 mm
 Each Compact fiber dome is packed in a transparent sealed bag.

All products suitably packed in recyclable materials and clearly labelled with Attema article number and description.

Physical characteristics

Color: Dome black, base grey
 Diameter closure Ø85mm
 Length closure 155mm
 Material: Molded Plastic
 Weight: 0,165 kg
 Cable diameters: Ø 5 mm – Ø 6,5 mm
 Number of cable ports: 2 (1 in / 1 out)
 Number of fibers: 2
 Splice tray capacity: 2 splice protectors ANT/mini heatshrink or
 2 splice protectors heatshrink Ø 2,4 mm x 45 mm.

Fiber bending radius: R = 22,5mm
 Looping length of fibers: 23 cm

Technical characteristics

Cable retention: >150N

Cable torsion: 90 degrees, 400mm
 No degradation, no leakage.

Impact: IK09
 No degradation, no leakage.

Crush resistance: 1000N and,
 Copes with the load mentioned in EN124 classification B125 under the following conditions:
 - Sandcoverage at least 30cm.
 - Fiber repair dome is embedded in sand.

Water immersion: IP68, EN 60529
 Water depth 1 meter, 7 days, no leakage

Chemical Resistance: 5%HCL, 5%NaOH, 5%NaCl
 Kerosene (lamp oil), petroleum jelly,
 diesel for cars EN590.
 24 hours, no leakage

Vibration: 10 Hz, Amplitude 3mm, during 10 days,
 No failure

Temperature: Storage -10 °C / + 50 °C
 Installation -10 °C / + 50 °C
 In use -20 °C / + 60 °C

Permanent UV radiation may influence the properties of this product.

After opening the foam O-ring can be used again, if no damage is noticeable.