

47U**42U****36U****26U**

Description

HCS DataLine series includes a wide range of high quality racks, cabinets and enclosures, specially designed for structured premise cabling in local area networks (LANs), including distribution and equipment, cross connect cabinets and racks, splice boxes, climate control and many more components for both copper and fiber optic cabling systems.

HCS DataLine 10 800x800 Free Standing Cabinets are suitable for both office environments & equipment rooms, having an attractive design combined with a long-lasting, solid & stable construction, guaranteed by the HCS DataLine Logo & Trademark

Applications

The special design of HCS DataLine 10 Free Standing Cabinets allows the use of a large variety and types of accessories, including 19" panels, hubs and active equipment, fixed and/or sliding shelves, fan units, power strips, pulleys, grounding and potential equalization bus bars, lighting units, stacking kits, floor fixing kits, cable management panels, and many other 19" devices and accessories

Qualifications and Approvals

HCS DataLine 10 Free Standing Cabinets are supported by HCS DoubleSafe™ QA Program and they comply to the following standards:

General	Steel Sheets	Powder Coating	Mechanical	Assembly	IT equipment safety	Fan Unit & Power Strips
<input type="checkbox"/> TS EN 60297-3-100/101/102	<input type="checkbox"/> DIN EN 10130-91	<input type="checkbox"/> DIN 67530	<input type="checkbox"/> TS EN 61587-1	<input type="checkbox"/> TS EN 60917-2-1/-2	<input type="checkbox"/> TS EN 60950-1	<input type="checkbox"/> TS EN 60439-1
<input type="checkbox"/> DIN 41494	<input type="checkbox"/> DIN EN 10327	<input type="checkbox"/> ASTM D 2796			<input type="checkbox"/> IEC 60364-7-707	<input type="checkbox"/> TS EN 62208
<input type="checkbox"/> TS EN 60529-1	<input type="checkbox"/> EREĞLİ 6112	<input type="checkbox"/> ASTM D 3451				
<input type="checkbox"/> IP20 (Optional IP 42)						



GENERAL PROPERTIES	
MATERIAL	Sheet & Galvanized steel. 1.0/1.2/1.5/2.0 mm thickness.
PAINT AND COLOR	Special steel finish with electrostatic powder coat, RAL 9005 black. Other colors available upon request.
FRONT DOOR	Double opening framed glass door, multipoint europrofile cylinder lock. (135 degree opening)
REAR DOOR	Double opening solid door, multipoint europrofile cylinder lock. (135 degree opening)
SIDE PANEL	Removable side panels, cylinder locking. Sliding locking
TOP CHASSIS	300 x 70mm brushed cable entry hole, 2x optional ventilation units
BOTTOM CHASSIS	300 x 70mm brushed cable entry hole, 2x, Sliding brushed cable entry 300 x 300mm 1x
19" PROFILES	Adjustable 4 units (U marked 2x front) 2x rear
VERTICAL CABLE ORGANIZER	Mountable front left & right vertically (optional).
SIDE VERTICAL OPEN CABLE ORGANIZER	Mountable side left / right- galvanised.
PDU	9 Way schuko type power strip
GROUNDING	Grounding Cable
LOADING CAPACITY	1500 kg max. (42U, TS EN 61587-1).

General	Steel Sheets	Powder Coating	Mechanical	Assembly	IT equipment safety	Fan Unit & Power Strips
<input type="checkbox"/> TS EN 60297-3-100/101/102	<input type="checkbox"/> DIN EN 10130-91	<input type="checkbox"/> DIN 67530	<input type="checkbox"/> TS EN 61587-1	<input type="checkbox"/> TS EN 60917-2-1/-2	<input type="checkbox"/> TS EN 60950-1	<input type="checkbox"/> TS EN 60439-1
<input type="checkbox"/> DIN 41494	<input type="checkbox"/> DIN EN 10327	<input type="checkbox"/> ASTM D 2796			<input type="checkbox"/> IEC 60364-7-707	<input type="checkbox"/> TS EN 62208
<input type="checkbox"/> TS EN 60529-1	<input type="checkbox"/> EREĞLİ 6112	<input type="checkbox"/> ASTM D 3451				
<input type="checkbox"/> IP20 (Optional IP 42)						

CABINETS ACCESSORIES




Ventilation units



Horizontal organizer



9 WAY PDU 19" PDU

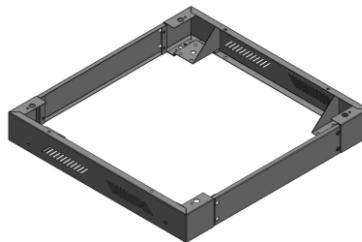

Plinth



Organizer with front cover



Grounding Busbar



Wheel

HCS P/N	Description	internal Height mm	Width mm	Depth mm	Height mm	Net Weight Kg	Notes
C10-01688 EU	16U 19" (w800 x d800)mm DATALINE™10 FREE STANDING NETWORK CABINET (Double opening framed glass front doors, with multi point euro profile cylinder lock,6 pcs brush)	712	780	800	862	65	
C10-02088 EU	20U 19" (w800 x d800)mm DATALINE™10 FREE STANDING NETWORK CABINET (Double opening framed glass front doors, with multi point euro profile cylinder lock,6 pcs brush)	890	780	800	1040	75	
C10-02288 EU	22U 19" (w800 x d800)mm DATALINE™10 FREE STANDING NETWORK CABINET (Double opening framed glass front doors, with multi point euro profile cylinder lock,6 pcs brush)	980	780	800	1130	76	
C10-02688 EU	26U 19" (w800 x d800)mm DATALINE™10 FREE STANDING NETWORK CABINET (Double opening framed glass front doors, with multi point euro profile cylinder lock,6 pcs brush)	1156	780	800	1306	80	
C10-03288 EU	32U 19" (w800 x d800)mm DATALINE™10 FREE STANDING NETWORK CABINET (Double opening framed glass front doors, with multi point euro profile cylinder lock,6 pcs brush)	1422	780	800	1572	88	
C10-03688 EU	36U 19" (w800 x d800)mm DATALINE™10 FREE STANDING NETWORK CABINET (Double opening framed glass front doors, with multi point euro profile cylinder lock,6 pcs brush)	1600	780	800	1750	96	
C10-03988 EU	39U 19" (w800 x d800)mm DATALINE™10 FREE STANDING NETWORK CABINET (Double opening framed glass front doors, with multi point euro profile cylinder lock,6 pcs brush)	1734	780	800	1884	101	
C10-04288 EU	42U 19" (w800 x d800)mm DATALINE™10 FREE STANDING NETWORK CABINET (Double opening framed glass front doors, with multi point euro profile cylinder lock,6 pcs brush)	1867	780	800	2028	107	
C10-04488 EU	44U 19" (w800 x d800)mm DATALINE™10 FREE STANDING NETWORK CABINET (Double opening framed glass front doors, with multi point euro profile cylinder lock,6 pcs brush)	1956	780	800	2106	111	
C10-04788 EU	47U 19" (w800 x d800)mm DATALINE™10 FREE STANDING NETWORK CABINET (Double opening framed glass front doors, with multi point euro profile cylinder lock,6 pcs brush)	2090	780	800	2240	117	

800x800 Free Standing Cabinets

