



V2

Robust and compact pneumatic operated fiber blowing machine with the unique Joystick controller securing optimal control of the installation. This machine can be configured from 2,4 to 16 mm cable and 7 to 50 mm duct. Anodized aluminum construction makes this machine both lightweight and easy to maintain.



FIBER BLOWING MACHINE FOR CABLE 2.4-16 MM / DUCT 7-50 MM


- Pneumatic operation, double motors.
- Electronic counter for speed and distance.
- Gentle operation with 450 mm belt length.
- Display for speed, distance and pressure in duct.
- Max. speed: 200 m/min, max. pushing force on cable: 550 N.
- Adjustable clamping force.
- Works with JetLogger.
- Joystick Controller with forward and reverse function.

NEW FUNCTIONS!

Duct Air Release: Duct Air Release Valve, making the reduction of air from the duct very fast.

TECHNICAL DATA

-  **Max pressure:**
16 Bar
-  **Pushing force:**
up to 550 N
-  **Cable diameter:**
2,4 - 16 mm
-  **Duct diameter:**
7 - 50 mm
-  **Weight:**
approx 10,5 kg
-  **Air connection:**
¾ " Claw connector
-  **WxHxD**
360 x 230 x 410 mm

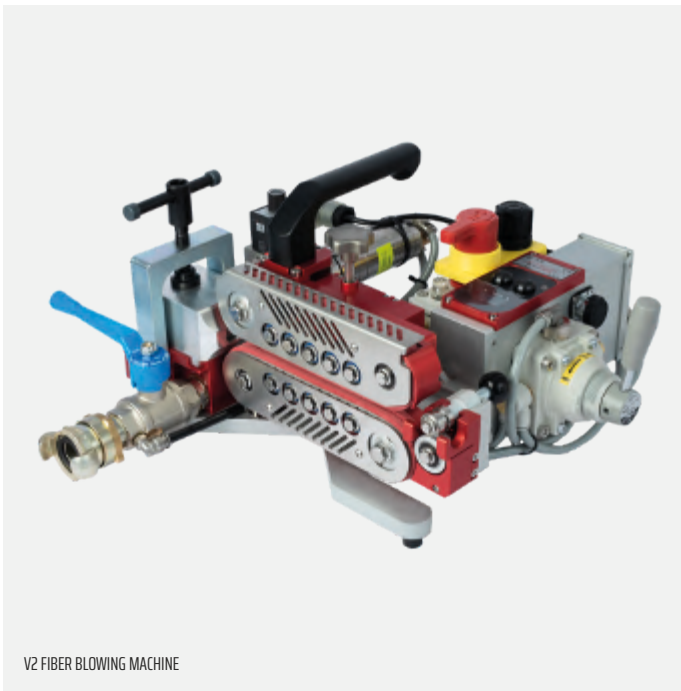

V2 FIBER BLOWING MACHINE



V2 FIBER BLOWING MACHINE




DUCT CLAMP (AVAILABLE IN 3 DIFFERENT SIZES)




AFTERBLOWER



CABLE GUIDE (AVAILABLE IN 3 DIFFERENT SIZES)

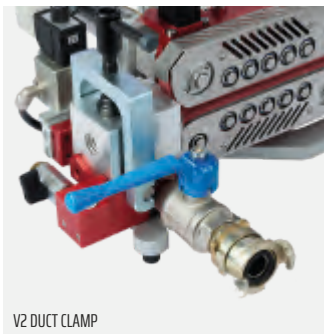

V2 DUCT CLAMP

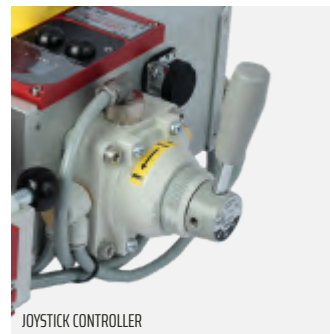

JOYSTICK CONTROLLER



DUCT AIR VALVE



AIR REGULATOR WITH EMERGENCY STOP

STD CONFIGURATION V2

- Transport case
- Extra fixtur
- 1 bottle Micro Duct Lube
- 1 bottle Duct Lube
- 1 bottle pneumatic oil
- Service kit

ACCESSORIES FOR V2

- Afterblower
- Floating kit
- 9-12 V adaptor. For replacing 9 V battery for digital display
- Duct air quick release valve
- Jetlogger
- Duct clamps
- Cabel guides